

## SPECIFICATION



### LED Strip Light

2025-24V-200P-10M

#### Specification

|                  |  |  |  |  |
|------------------|--|--|--|--|
| PRODUCT NAME :   | LED4M-CANDY-MICRO-ROPELIGH-24V-200LED10M                     |  |  |  |
| MODEL NO. :      | 24V-200P-10M   |  |  |  |
| SPECIFICATION :  | DC24V  |  |  |  |
| WORKING TEMP :   | -20-60(° C)  |  |  |  |
| CRI(RA) :        | /  |  |  |  |
| COLOR :          | White and Red Color  |  |  |  |
| LIGHT SOURCE :   | LED Chip   |  |  |  |
| LIFE TIME :      | 30000hrs   |  |  |  |
| BEAM ANGLE :     | 360°   |  |  |  |
| PRODUCT SIZE :   | φ 9mm  |  |  |  |
| CUTTING LENGTH : | /  |  |  |  |
| IP :             | IP65   |  |  |  |
| APPLICATION :    | Residential lighting, decorative lighting, Home, Shop, Hotel |  |  |  |
| WARRANTY :       | 2 Years  |  |  |  |
| STANDARD :       | CETL   |  |  |  |
| CCT & LUMEN:     | W  |  |  |  |
|                  |  |  |  |  |

\* The above measurements of watts, brightness and efficiency allowance tolerance ±10%.






www.led4m.ca




INFO@LED4M.CA



## Waterproof Ways:

| Waterproof Ways   | IP Rating | Details   |
|---|-----------|---|
|  | IP 54     | PU or Silicone glue on the surface of the led strips. |
|  | IP 65     | Injected with Silicone Tube.                          |
|  | IP 67     | IP67 Extrusion, Integrated Silicone.                  |

## Installation Way:

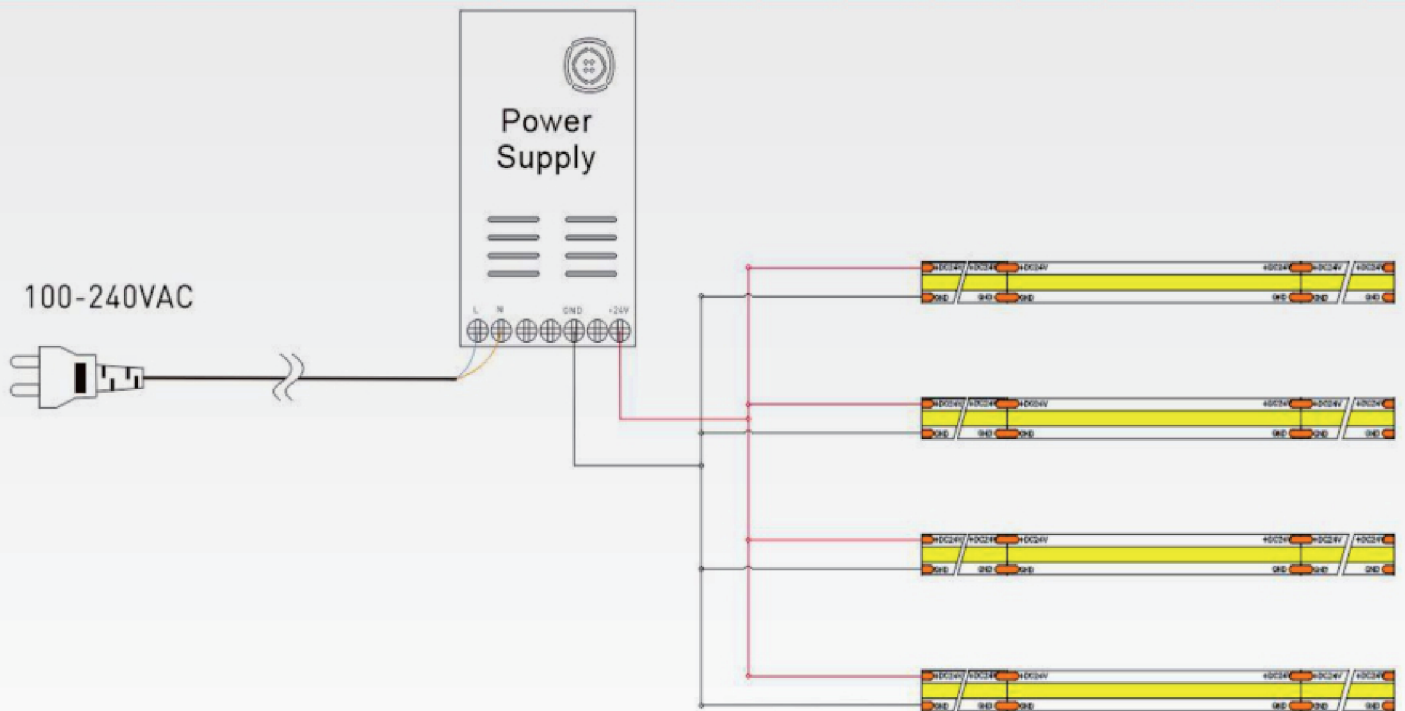

- \* The max running length is 5 meters, for over 5 meters please connect in parallel.
- \* Make sure of the total watts of COB Strip lights is less than 80% of the power supply's max output.
- \* Match the polarities according to the mark ('+' and '-') in the PCB while connecting.