


SPECIFICATION

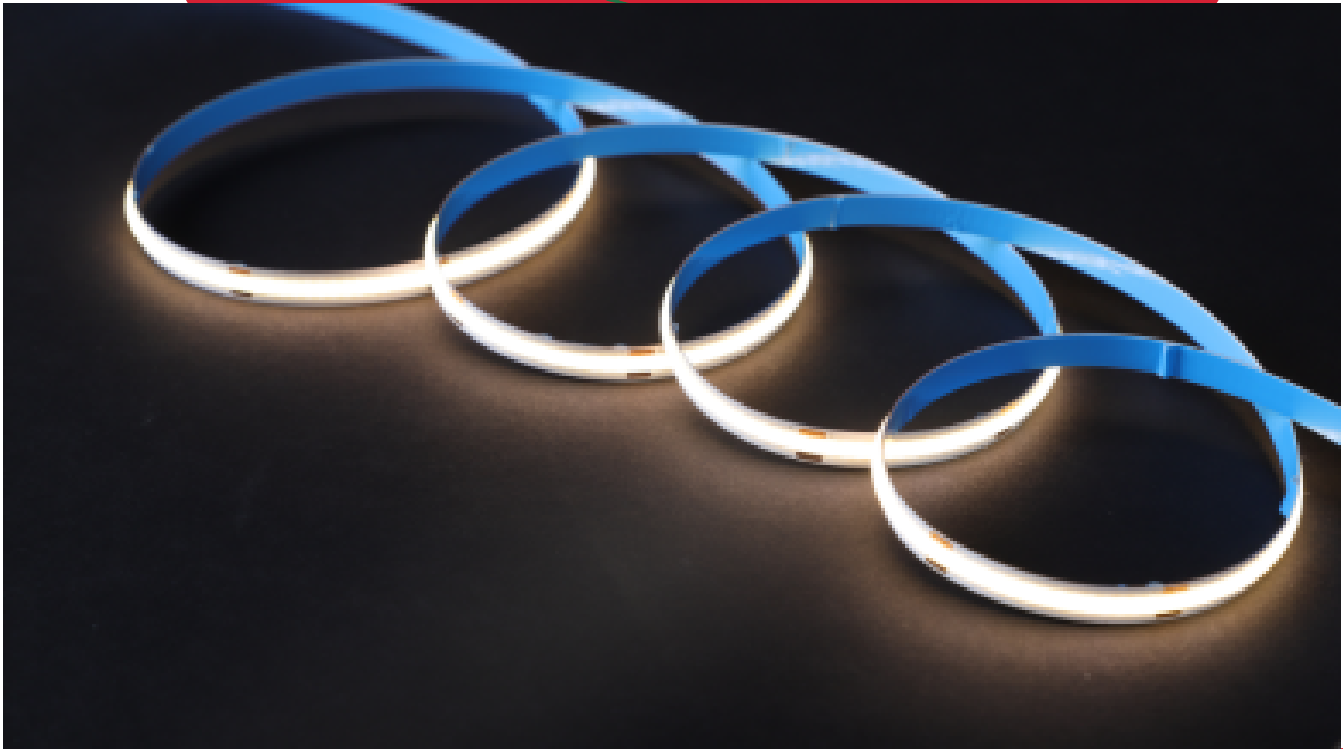

LED Strip Light

COB-480P-8-24V

Specification

| | | | |
|------------------|--|--|--|
| PRODUCT NAME : | LED4M-COB-480P-8-24V | | |
| MODEL NO. : | COB-480P-8-24V | | |
| SPECIFICATION : | DC24V,10W/M | | |
| WORKING TEMP : | -20-40(° C) | | |
| CRI(RA) : | >90 | | |
| COLOR : | White Color | | |
| LIGHT SOURCE : | COB Chip | | |
| LIFE TIME : | 30000hrs | | |
| BEAM ANGLE : | 120° | | |
| PRODUCT SIZE : | 5000*8mm | | |
| CUTTING LENGTH : | 5mm | | |
| IP : | IP20 | | |
| APPLICATION : | Residential lighting, decorative lighting, Home, Shop, Hotel | | |
| WARRANTY : | 2 Years | | |
| STANDARD : | ETL | | |
| CCT & LUMEN: | 2700K/3000K/4000K/6500K | | |
| | 750-1000LM/M | | |

* The above measurements of watts, brightness and efficiency allowance tolerance $\pm 10\%$.






www.led4m.ca




INFO@LED4M.CA



Waterproof Ways:

| Waterproof Ways | IP Rating | Details |
|---|-----------|---|
|  | IP 54 | PU or Silicone glue on the surface of the led strips. |
|  | IP 65 | Injected with Silicone Tube. |
|  | IP 67 | IP67 Extrusion, Integrated Silicone. |

Installation Way:

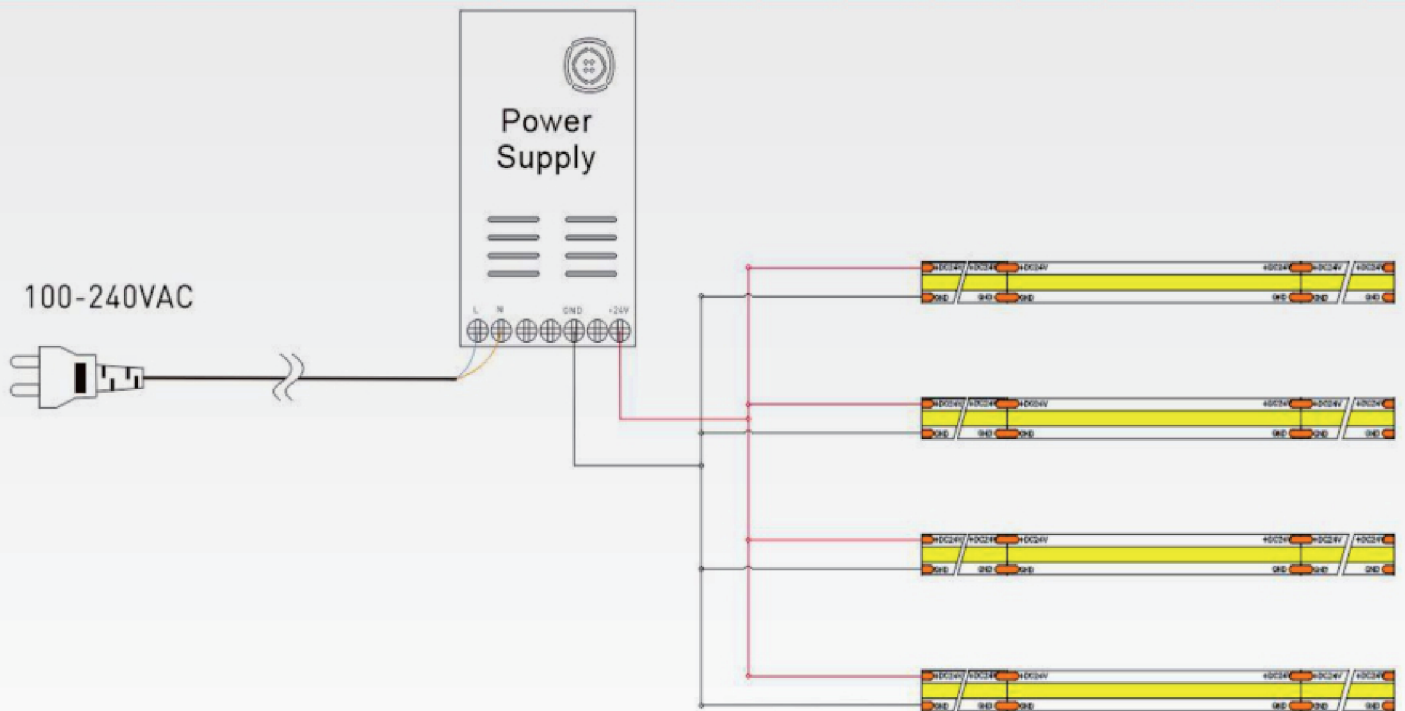

- * The max running length is 5 meters, for over 5 meters please connect in parallel.
- * Make sure of the total watts of COB Strip lights is less than 80% of the power supply's max output.
- * Match the polarities according to the mark ('+' and '-') in the PCB while connecting.