



Lighting Accessories  
and  
Fixtures  
(2025\_2026)






# Product List



LED PANEL LIGHTS ..... 1-5



DOWN LIGHTS ..... 7-11



SWITCH AND RECEPTACLES ..... 13-17



GARDEN LIGHTS ..... 19-24



DRIVERS ..... 26



PENDANT LIGHTS ..... 28-31




LED STRIP LIGHTS ..... 33-47



# LED PANEL LIGHTS






### **BACK-LIT PANEL LIGHT (No Flicker)**

**ITEM:LED4M-BPL22-40W-5CCT-DV-LVDM**

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
15-20 25-30-40W	2*2"	40	80	120°	553*553MM	AC 120-347V 50-60Hz	5000LM

**CCT:** 3500-4000-5000-5700-6500K (Selectable)

Dimmable: 0-10V




### **BACK-LIT PANEL LIGHT (No Flicker)**

**ITEM:LED4M-BPL24-72W-5CCT-DV-LVDM**

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
30-40 50-60-72W	2*4"	40	80	120°	1163*553MM	AC 120-347V 50-60Hz	9000LM

**CCT:** 3500-4000-5000-5700-6500K (Selectable)

Dimmable: 0-10V




### **BACK-LIT PANEL LIGHT (No Flicker)**

**ITEM:LED4M-BPL14-40W-5CCT-DV-LVDM**

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
15-20 25-30-40W	1*4"	40	80	120°	1163*253MM	AC 120-347V 50-60Hz	5000LM

**CCT:** 3500-4000-5000-5700-6500K (Selectable)

Dimmable: 0-10V




### **BACK-LIT PANEL LIGHT (No Flicker)**

**ITEM:LED4M-S-BPL22-40W-5CCT-DV-LVDM**

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
15-20 25-30-40W	2*2"	40	80	120°	553*553MM	AC 120-347V 50-60Hz	5000LM

**CCT: 3500-4000-5000-5700-6500K (Selectable)**      With 3.5MM Sensor Base

Dimmable: 0-10V




### **BACK-LIT PANEL LIGHT (No Flicker)**

**ITEM:LED4M-S-BPL24-72W-5CCT-DV-LVDM**

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
30-40 50-60-72W	2*4"	40	80	120°	1163*553MM	AC 120-347V 50-60Hz	9000LM

**CCT: 3500-4000-5000-5700-6500K (Selectable)**      With 3.5MM Sensor Base

Dimmable: 0-10V




### **BACK-LIT PANEL LIGHT (No Flicker)**

**ITEM:LED4M-S-BPL14-40W-5CCT-DV-LVDM**

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
15-20 25-30-40W	1*4"	40	80	120°	1163*253MM	AC 120-347V 50-60Hz	5000LM

**CCT: 3500-4000-5000-5700-6500K (Selectable)**      With 3.5MM Sensor Base

Dimmable: 0-10V



### **BACK-LIT PANEL LIGHT (No Flicker)**

**ITEM: LED4M-BPL22-PLC-40W-5CCT-DV-LVDM**


Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
0-40W	2*2"	40	80	120°	553*553MM	AC 120-277V 50-60Hz	5000LM

**CCT:** 2700-6500K (Smart Switch)

Smart Dimming: 0-10V

PLC Smart Switch

Scene Mode



### **BACK-LIT PANEL LIGHT (No Flicker)**

**ITEM: LED4M-BPL24-PLC-72W-5CCT-DV-LVDM**


Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
0-72W	2*4"	40	80	120°	1163*553MM	AC 120-277V 50-60Hz	9000LM

**CCT:** 2700-6500K (Smart Switch)

Smart Dimming: 0-10V

PLC Smart Switch

Scene Mode



### **BACK-LIT PANEL LIGHT (No Flicker)**

**ITEM: LED4M-BPL14-PLC-40W-5CCT-DV-LVDM**

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
0-40W	1*4"	40	80	120°	1163*253MM	AC 120-277V 50-60Hz	5000LM

**CCT:** 2700-6500K (Smart Switch)

Smart Dimming: 0-10V

PLC Smart Switch

Scene Mode



### PLC SMART SWITCH

ITEM: LED4M-SM-PLC800W-K1

Maximum Load	Dimension	Brightness	Wiring	Control	Voltage	Wire Wiring
800W/6.6A	L:4.35*W:2.76 T:0.27*D:1.43"	0-100% (Adjustable)	Single Pole	Touch-Tone	AC 120-277V 50-60Hz	Neutral Single Live

CCT: 2700-6500K (Smart Switch)

Smart Dimming: 0-10V

Turn On/Off

Three Scene Mode



### MICROWAVE SENSOR

ITEM: LED4M-MS-HD08VR-MIC-1

Frequency	Microwave Power	Detection Angle	Detection Distance
5.8GHz±75MHz	<0.3MW	30-150° (Without Glass Cover)	≥3M/9FT



### PIR SENSOR

ITEM: LED4M-MS-HD08VR-P-1

Warm up Period	Installation Height	Detection Angle	Detection Distance
10S	4M/13.12 Max	Fresnel Lens ≤120° 360° Ceiling Mounted	Radius 2-4M



**SURFACE MOUNTED KIT**

**ITEM:LED4M-SUR-KIT-BPL22**

**Description:**

Surface Mounted Kit

Cut Size: 50\*608\*608MM

For 2\*2" Panel



**SURFACE MOUNTED KIT**

**ITEM:LED4M-SUR-KIT-BPL24**

**Description:**

Surface Mounted Kit

Cut Size: 50\*1218\*608

For 2\*4" Panel



**SURFACE MOUNTED KIT**

**ITEM:LED4M-SUR-KIT-BPL14**

**Description:**

Surface Mounted Kit

Cut Size: 50\*1218\*308

For 1\*4" Panel



# DOWN LIGHTS





### 3" RECESSED LED DOWN LIGHT

ITEM:LED4M-3-TR-OD92-9W-5CCT-DIM

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
9W	H:47*D:92MM	40	90	36°	75MM	AC 100-130V 50-60Hz	630LM

CCT:2700-3000-3500-4000-5000K (Adjustable)

Dimmable

Reflector Color: White-Black

Osram Chip



### 4" RECESSED LED DOWN LIGHT

ITEM:LED4M-4-TR-OD118-12W-5CCT-DIM

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
12W	H:50*D:118MM	40	90	36°	95MM	AC 100-130V 50-60Hz	840LM

CCT:2700-3000-3500-4000-5000K (Adjustable)

Dimmable

Reflector Color: White-Black

Osram Chip



### 2" TRIMLESS LED DOWN LIGHT

ITEM:LED4M-2-TR-OD81-8W-5CCT-DIM

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
8W	H:70*D:81MM	40	90	36°	55MM	AC 100-130V 50-60Hz	560LM

CCT:2700-3000-3500-4000-5000K (Adjustable)

Dimmable

Reflector Color: White-Black

Osram Chip



### 3" TRIMLESS LED DOWN LIGHT

ITEM: LED4M-3-TR-OD100-12W-5CCT-DIM

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
12W	H:85*D:100MM	40	90	36°	75MM	AC 100-130V 50-60Hz	840LM

**CCT:** 2700-3000-3500-4000-5000K (Adjustable)

Dimmable

**Reflector Color:** White-Black

Osram Chip



### 3" RECESSED LED GIMBAL LIGHT

ITEM: LED4M-3-RG-12W-5CCT-DIM

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
12W	H:64*D:94MM	40	90	36°	80-85MM	AC 100-130V 50-60Hz	840LM

**CCT:** 2700-3000-3500-4000-5000K (Adjustable)

Dimmable

**Reflector Color:** White-Black

Osram Chip



### 4" RECESSED LED GIMBAL LIGHT

ITEM: LED4M-4-RG-15W-5CCT-DIM

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
15W	H:68*D:114MM	40	90	36°	95-105MM	AC 100-130V 50-60Hz	1000LM

**CCT:** 2700-3000-3500-4000-5000K (Adjustable)

Dimmable

**Reflector Color:** White-Black

Osram Chip



### 5" RECESSED LED GIMBAL LIGHT

ITEM:LED4M-5-RG-24W-5CCT-DIM

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
24W	H:74*D:140MM	40	90	36°	120-130MM	AC 100-130V 50-60Hz	2000LM

CCT:2700-3000-3500-4000-5000K (Adjustable)

Dimmable

Reflector Color: White-Black

Osram Chip



### 4" MULTI LED DISK LIGHT


ITEM:LED4M-4-MAG-9W-5CCT-DIM

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
9W	H:40*D:125MM	40	90	110°	108MM	AC 100-130V 50-60Hz	750LM

CCT:2700-3000-3500-4000-5000K (Adjustable)

Dimmable

Trim Color: White-Black



### 6" MOUNTING PLATE ROUND HOLE WITHOUT LIP

ITEM:LED4M-4-MAG-9W-5CCT-DIM

Dimension	Hole Size	Thickness	Material
0.7*215*336MM	57-80-108-130-159MM	0.7MM	Galvanized Metal

Two Side With Ruler

Both Sides With Markings

Plate With 4 Lines And Two Punches


**NEPTON (4" Round 360° Gimbal Light)**
**ITEM: MB14021201001**

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
9W	H:49*D:125MM	20	80	38°	96MM	AC 120V 60Hz	630LM

**CCT: 3000-4000-5000K (Adjustable)**
**Dimmable**

**APOLO**
**ITEM: MB1402121201022**

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
9W	H:12*D:120MM	20	80-85	38°	100-110MM	AC 100-130V 60Hz	720-810LM

**CCT: 2700-3000-3500-4000-5000K (Adjustable)**
**No Flicker And Noise**

**APOLO**
**ITEM: MB1402121201023**

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
12W	H:12*D:170MM	20	80-85	38°	150-160MM	AC 100-130V 60Hz	960-1080LM

**CCT: 2700-3000-3500-4000-5000K (Adjustable)**
**No Flicker And Noise**

**MARS****ITEM: MB1402121201024**

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
9W	H:12*D:120MM	20	80-85	38°	100-110MM	100-130V AC/60Hz	720-810LM

**CCT: 2700-6500K+RGB****Wi-Fi-Bluetooth LED Retrofit Light**

Work With Alexa-Google Assistant

**TITAN (Fire Proof)****ITEM: MB1402121201025**

Watt	Dimension	IP	CRI	Beam Angle	Cut Size	Voltage	Luminous
9W	H:24*D:125MM	20	80-85	38°	105MM	100-130V AC/60Hz	720-810LM

**CCT: 2700-3000-3500-4000-5000K (Adjustable)****Air Tight Rated**

Dimmable

**2 Hour Fire Rating Tested To Comply**



# SWITCH AND RECEPTACLES





**ITEM: MBDS15**

**Description:**

15A / 120-277V / Decorative Rocker Switch/ Single Pole  
White Color



**ITEM: MBDS15**

**Description:**

15A / 120-227V / Decorative Rocker Switch / Single Pole  
Black Color



**ITEM: MBDS15.3**

**Description:**

15A / 120-277V / Decorative Rocker Switch / 3-Ways  
White Color



**ITEM: MBDS15.3**

**Description:**

15A / 120-227V / Decorative Rocker Switch / 3-Ways  
Black Color



**ITEM: MBDT15Q**

**Description:**

15A / 125V AC / Decorative TR Receptacle / Push-In Wire  
White Color



**ITEM: MBDT15Q**

**Description:**

15A / 125V AC / Decorative TR Receptacle / Push-In Wire  
Black Color



**ITEM: MBGW15**

**Description:**

15A / 125V / Self-Test GFCI / UL943 2018 Version  
TR&WR Weather Resistant  
White Color



**ITEM: MBGW15**

**Description:**

15A / 125V / Self-Test GFCI / UL943 2018 Version  
TR&WR Weather Resistant  
Black Color



**ITEM: MBFTR15QC**

**Description:**

15A / 125V / 20W / Quick Charger PD3.0+QC3.0 USB / Outlet  
White Color



**ITEM: MBFTR15QC**

**Description:**

15A / 125V / 20W / Quick Charger PD3.0+QC3.0 USB / Outlet  
Black Color



**ITEM: MBBSS01**

**Description:**

American standard / 120V 60HZ 600W / AC Power / Single Pole  
Incandescent Dimmer Switch  
White Color



**ITEM: MBBSSK-1**

**Description:**


15A / 120-277V / US standard / Single Pole  
Double Decorative Switch On/Off  
White Color



**ITEM: MBBS1803**

**Description:**


1 Gang Standard / Decorative Screwless Wallplate  
70\*115mm 2.75\*4.53"  
White Color



**ITEM: MBBS1803**

**Description:**

1 Gang Standard / Decorative Screwless Wallplate  
70\*115mm 2.75\*4.53"  
Black Color



**ITEM: MBBS18032**

**Description:**


2 Gang Standard / Decorative Screwless Wallplate  
116\*115mm 4.56\*4.53"  
White Color



**ITEM: MBBS18032**

**Description:**

2 Gang Standard / Decorative Screwless Wallplate  
116\*115mm 4.56\*4.53"  
Black Color



**ITEM: MBBS18033**

**Description:**


3 Gang Standard / Decorative Screwless Wallplate  
162\*115mm 6.38\*4.53"  
White Color



**ITEM: MBBS18033**

**Description:**


3 Gang Standard / Decorative Screwless Wallplate  
162\* 115mm 6.38\*4.53"  
Black Color



**ITEM: MBBS18034**

**Description:**

4 Gang Standard / Decorative Screwless Wallplate  
208\*115mm 8.19\*4.53"  
White Color



**ITEM: MBBS18034**

**Description:**

4 Gang Standard / Decorative Screwless Wallplate  
208\*115mm 8.19\*4.53"  
Black Color



# GARDEN LIGHTS

ANTIQUE SERIES





### ANTIQUE (Pillar Lamp)

ITEM:MB1402121201013

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:6.3 W:6.3*H:17.1"	44	120V	E26	Celt



### ANTIQUE (Pendant Lamp)

ITEM:MB1402121201014

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:6.3 W:6.3*H:13.6"	23	120V	E26	Celt

60CM Length Chain



### ANTIQUE (Wall Lamp)

ITEM:MB1402121201012

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:6.3 W:7.48*H:15"	23	120V	E26	Celt



### ANTIQUE (Pillar Lamp)

ITEM:MB1402121201016

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:8 W:5.9*H:14.9"	44	120V	E26	Celt



### ANTIQUE (Pendant Lamp)

ITEM:MB1402121201017

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:8 W:8*H:11.8"	23	120V	E26	Celt

60CM Length Chain



### ANTIQUE (Wall Lamp)

ITEM:MB1402121201015

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:8 W:7.3*H:11.8"	23	120V	E26	Celt



### ANTIQUE (Garden Lamp)

ITEM:MB1402121201021

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:5.9 W:5.9*H:53.5"	44	120V	E26	Celt

1M Pole



### ANTIQUE (Pillar Lamp)

ITEM:MB1402121201019

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:5.9 W:5.9*H:18.1"	44	120V	E26	Celt



### ANTIQUE (Pendant Lamp)

ITEM:MB1402121201020

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:5.9 W:5.9*H:13.7"	23	120V	E26	Celt

60CM Length Chain



### ANTIQUE (Wall Lamp)

ITEM:MB1402121201018

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:5.9 W:7.8*H:17.3"	23	120V	E26	Celt



### ANTIQUE (Garden Lamp)

ITEM:MB1402121201008

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:8.66 W:5.9*H:53.15"	44	120V	E12*2	Celt

1M Pole



### ANTIQUE (Post Lamp)

ITEM:MB14021212006

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:8.66 W:6.69*H:18.5"	44	120V	E12*2	Celt



### ANTIQUE (Pendant Lamp)

ITEM:MB1402121201007

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:8.66 W:6.69*H:13.4"	23	120V	E12*2	Celt

60CM Length Chain



### ANTIQUE (Wall Lamp)

ITEM:MB1402121201005

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:8.66 W:6.69*H:13.38"	23	120V	E12*2	Celt



### ANTIQUE (Pillar Lamp)

ITEM:MB1402121201010

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:10.4 W:10.4*H:25"	44	120V	E12*2	Celt

Change Lamp Holder To



### ANTIQUE (Pendant Lamp)

ITEM:MB1402121201011

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:10.4 W:10.4*H:19.8"	23	120V	E12*2	Celt

**60CM Length Chain**



### ANTIQUE (Wall Lamp)

ITEM:MB1402121201009

Bulb Wattage	Dimension	IP	Voltage	Bulb Base	Certification
60W	L:10.4 W:12.2*H:19.8"	23	120V	E12*2	Celt

**Change Lamp Holder To**



# DRIVERS




**ITEM: LED4M-LM-EMLV-96W-24V-CL2-DIM**

**Description:**

Input: AC 120V 60Hz / 1.1A / Black-White-Green

Output: DC 24V / 4A / 96W Max / Black-RED / Class 2

Dimmable: ELV-MLV-Triac

**ITEM: LED4M-LM-EMLV-150W-24V-5IN1-DIM**

**Description:**

Input: AC 110-277V 50-60Hz / 1.8A / Black-White-Green

Output: DC 24V / 6.25A / 150W Max / Black-RED / Class P

Dimmable: Triac-Phase / 0-10V / 1-10V / Potentiometer / 10V PWM

**ITEM: LED4M-LM-EMLV-192W-24V-5IN1-CL2**

**Description:**

Input: AC 110-277V 50-60Hz / 2.2A / Black-White-Green

Output: DC 24V/ 2\*4A / 192W Max / Black-RED / Class 2-P/ Type HL

Dimmable: Triac-Phase / 0-10V / 1-10V / Potentiometer / 10V PWM

**ITEM: LED4M-LM-EMLV-288W-24V-5IN1-JC5-CL2**

**Description:**

Input: AC 120-277V 50-60Hz / 3.6A / Black-White-Green

Output: DC 24V/ 3\*4A / 288W Max / Black-RED / Class 2-P/ Type HL

Dimmable: Triac-Phase / 0-10V / 1-10V / Potentiometer / 10V PWM



# PENDANT LIGHTS





### **CEILING MOUNTED (LED Hover Pendant Light)**

**ITEM: LED4MTD22D15A**

Watt	Dimension	IP	CRI	Beam Angle	Power Factor	Voltage	Luminous
14W	L:150 D:74*CL:0-1500MM	20	90	24°	0.9	AC 120V 50-60Hz	1150LM

**CCT: 3000-4000-5000K (Adjustable)**

Dimmable

**Body Color:** Black

Damp Location



### **HALO ADAPTER TRACK MOUNTED (LED Hover Pendant Light)**

**ITEM: LED4MTD22D15A-TK**

Watt	Dimension	IP	CRI	Beam Angle	Power Factor	Voltage	Luminous
14W	L:150 D:74*CL:0-1500MM	20	90	24°	0.9	AC 120V 50-60Hz	1150LM

**CCT: 3000-4000-5000K (Adjustable)**

Dimmable

**Body Color:** Black

Damp Location



### **CEILING MOUNTED (LED Hover Pendant Light)**

**ITEM: LED4MTD22D10C**

Watt	Dimension	IP	CRI	Beam Angle	Power Factor	Voltage	Luminous
10W	H:100 D:67*CL:0-1500MM	20	90	10-55° Adjustable	0.9	AC 120V 50-60Hz	850LM

**CCT: 4000-5000K**

Dimmable

**Body Color:** Black

Damp Location



### TRACK MOUNTED (LED Hover Pendant Light)

ITEM:LED4MGD22D10C

Watt	Dimension	IP	CRI	Beam Angle	Power Factor	Voltage	Luminous
10W	L:100 D:67*CL:0-1500MM	20	90	10-55° Adjustable	0.9	AC 120V 50-60Hz	850LM

CCT: 4000-5000K

Dimmable

**Body Color:** Black

Damp Location



### MULTI FUNCTIONAL (LED Track Light)

ITEM:LED4MGD16P30EO-5CCT

Watt	Dimension	IP	CRI	Beam Angle	Power Factor	Voltage	Luminous
8-12 18-24W	L:150*D:74MM	20	90	15-55° Adjustable	0.9	AC 120V 50-60Hz	2000LM

CCT:2700-3000-3500-4000-5000K (Adjustable)

Dimmable

**Body Color:** Black

Damp Location



### 3WIRES TRACK RAIL

ITEM:LED4M3A-06-6FT

#### Description:

6Feet-1828MM / Track Single Circuit / 120-250V 50-60Hz / 10A

3-Wires / Including End Cap

Black Color



### **3 WIRES L CONNECTOR**

**ITEM:LED4M3SL**

#### **Description:**

3 Wire L Connector / 120-250V 50-60Hz / 10A

L Connector: Connect Two Track Sections at a Right Angle

Black Color



### **3 WIRES POWER CONNECTOR**

**ITEM:LED4M3SP**

#### **Description:**

3 Wire Power Connector / 120-250V 50-60Hz / 10A

Live End: Required To Start a Run

Black Color



### **3 WIRES X CONNECTOR**

**ITEM:LED4M3SX**

#### **Description:**

3 Wire X Connector / 120-250V 50-60Hz / 10A

X-Connector: Connect Two Track Sections at an Cross Angle

Black Color



### **3 WIRES MINI I CONNECTOR**

**ITEM:** LED4M3SMI

#### **Description:**

3 Wire Mini I Connector / 120-250V 50-60Hz / 10A

Mini Joiner: Low Profile Joiner For Two Straight Track Sections

Black Color



### **3 WIRES END CAP**

**ITEM:** LED4M3SE

#### **Description:**

3 Wire End Cap / 120-250V 50-60Hz / 10A

Black Color



# LED STRIP LIGHTS





ITEM: LED4M-COB-320P-8-24V

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
10W/M	0.05M	DC 24V 50-60Hz	20	90	180°	8*2MM	5-10M/Roll	750-1000LM

**CCT:** 3000-4000K

Double-One End Out Of The Line

Good Flexiblility And Heat Dissipation

Strong Adhesive



ITEM: LED4M-ENDCON-COB-320P-IP20

### Description:

Front Cable Connector For COB 320P

For 8MM FPCB / For Connecting Strip To The Power Supply After Cutting



ITEM: LED4M-FLX-JOINCON-COB-320P-IP20

### Description:

Middle Cable Connector For COB 320P

For 8MM FPCB / For Connecting Strip To The Power Supply After Cutting



**ITEM:** LED4M-CLIP-COB-320P-IP20

### Description:

Clip For COB 320P / IP20

For 8MM FPCB



**ITEM:** LED4M-MID-CONN-COB-320P-IP20

### Description:

Middle Connector For COB 320P / For 8MM FPCB

For Connecting One Strip To The Other After Cutting With Seamless Connection



**ITEM:** LED4M-COB-480P-8-24V

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
10W/M	0.05M	DC 24V 50-60Hz	20	90	180°	8*2MM	5-10M/Roll	750-1000LM

**CCT:** 3000-4000K

Double-One End Out Of The Line

Good Flexiblility And Heat Dissipation

Strong Adhesive



**ITEM:LED4M-ENDCON-COB-480P-IP20**

### Description:

Front Cable Connector For COB 480P

For 8MM FPCB / For Connecting Strip To The Power Supply After Cutting



**ITEM:LED4M-FLX-JOINCON-COB-480P-IP20**

### Description:

Middle Cable Connector For COB 480P

For 8MM FPCB / For Connecting Strip To The Power Supply After Cutting



**ITEM:LED4M-CLIP-COB-480P-IP20**

### Description:

Clip For COB 480P / IP20

For 8MM FPCB



ITEM: LED4M-MID-CONN-COB-480P-IP20

### Description:

Middle Connector For COB 480P / For 8MM FPCB  
For Connecting One Strip To The Other After Cutting With Seamless Connection



ITEM: LED4M-2022-304P-6-120V

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
8.5W/M	0.25M	DC 120V 50-60Hz	65	80	120°	12*7MM	50M/Roll	580LM

**CCT:** 2800-4000-6000K

Surface-Embed



ITEM: LED4M-2022-304P-6-120V-BLK

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
8.5W/M	0.25M	DC 120V 50-60Hz	65	80	120°	12*7MM	50M/Roll	580LM

**CCT:** 4000K

Embed



**ITEM:LED4M-POWCORD-SUR/EMB-120V**

### Description:

Used For 120V Profile Strip  
Both For Surface & Embedded Strip Including Pins



**ITEM:LED4M-MIDDLE-CONN**

### Description:

Used For 120V Profile Strip  
Both For Surface & Embedded Strip Including Pins



**ITEM:LED4M-END-CAP**

### Description:

Used For 120V Profile Strip  
Both For Surface & Embedded Strip



ITEM: LED4M-U0408-2835-140P-24V

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
7W/M	0.007M	DC 24V 50-60Hz	65	80	180°	4*8MM	5-10M/Roll	350LM

**CCT:** 2700-4000-6000K

Double-One End Out Of The Line/ With-No Edge

Good Flexiblility And Heat Dissipation Tape  
Side Bending



ITEM: LED4M-U0606-2219-240P-24V

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
5W/M	0.025M	DC 24V 50-60Hz	65	90	120°	6.6MM	5-10M/Roll	350LM

**CCT:** 3000-4000K

Double End Out Of The Line/ With-No Edge

Good Flexiblility And Heat Dissipation Tape  
Side Bending



ITEM: LED4M-2022-COB-304P-6-120V

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
7W/M	0.5M	AC 120V 50-60Hz	65	80	120°	10.6*7MM	50M/Roll	600LM

**CCT:** 2800-4000-6000K



**ITEM:LED4M-POWCORD-2022-304P-FCOB-120V**

**Description:**

Power Cord For 2022-304P-10-120V/0.5M/13x8/FCOB



**ITEM:LED4M-CONN-2022-304P**

**Description:**

Connector For 2022-304P-10-120V/0.5M/13x8/FCOB



**ITEM:LED4M-END-CAP-2022-304P**

**Description:**

End Cap For 2022-304P-10-120V/0.5M/13x8/FCOB



ITEM: LED4M-2835-144P-120V

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
6W/M	1M	DC 120V 50-60Hz	65	80	180°	16*8MM	25-50M/Roll	100LM

CCT: 3000-4000-6000K



ITEM: LED4M-2022-276P-120V

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
8W/M	0.33M	DC 120V 50-60Hz	65	90	120°	15.26MM	5-15- 25M/Roll	200LM

CCT: 3000-4000-6000K



ITEM: LED4M-COB-320P-6.6-24V

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
7W/M	10MM	DC 24V 50-60Hz	20	90	180°	6.6*2MM	5-10M/Roll	600LM

**CCT: 3000-4000K**  
Double-One End Out Of The Line

Good Flexibility And Heat Dissipation  
Strong Adhesive



ITEM: LED4M-COB-320P-8-24V


Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
9W/M	5CM	DC 24V 50-60Hz	65	90	120°	8MM	5M/Roll	850LM

**CCT:** 3000-4000K

Double-One End Out Of The Line

Good Flexiblility And Heat Dissipation

Strong Adhesive

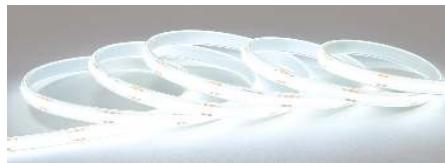

ITEM: LED4M-COB-480P-8-24V

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
10W/M	5CM	DC 24V 50-60Hz	65	80	120°	8MM	5M/Roll	75-95LM

**CCT:** 3000-4000K

Double-One End Out Of The Line

Good Flexiblility And Heat Dissipation

Strong Adhesive



ITEM: LED4M-2219-240P-8-24V

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
10W/M	5CM	DC 24V 50-60Hz	20	80	120°	10*5MM	10M/Roll	1200LM

**CCT:** 3000-4000K

Double End Out Of The Line



ITEM: LED4M-SMD2835-126P-1515

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
9W/M	5CM	DC 24V 50-60Hz	65	80	120°	15*15MM	5M/Roll	560LM

CCT: 3000-4000K



ITEM: LED4M-SMD2835-126P-0812

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
9W/M	5.5CM	DC 24V 50-60Hz	65	80	120°	8*12MM	5M/Roll	480LM

CCT: 3000-4000K



ITEM: LED4M-SMD2835-126P-1010

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
9W/M	5.5CM	DC 24V 50-60Hz	65	80	128°	10*10MM	5M/Roll	850LM


CCT: 3000-4000K



ITEM: LED4M-U500-2835-108P-120V

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
8W ±10%/M	0.5M	AC 120V 50-60Hz	65	80	120°	18.5*10.5MM	50M/Roll	200 ±10%LM

CCT: 2700-3000-4000K

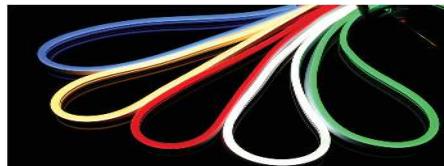

ITEM: LED4M-U350-2835-108P-120V

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
6W ±10%/M	0.5M	AC 120V 50-60Hz	65	80	120°	16*8MM	50M/Roll	100 ±10%LM

CCT: 2700-3000-4000K



ITEM: LED4M-NEON-5050-60P-8-120V

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
8W ±10%/M	0.5M	AC 120V 50-60Hz	65	80	120°	15*8MM	50M/Roll	450 ±10%LM

CCT: 2700-3000-4000K



**ITEM: LED4M-COB-360P-10-120V**

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
9W ±10%/M	0.25M	AC 120V 50-60Hz	65	80	120°	13.5*6.8MM	50M/Roll	600LM

CCT: 3000-4000K



**ITEM: LED4M-2022-288P-8-120V**

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
8.5W/M	0.25M	DC 120V 50-60Hz	65	80	120°	12*7MM	50M/Roll	580LM

CCT: 2800-4000-6000K

Surface-Embed



**ITEM: LED4M-U150-2835-108P-120V**

Watt	Cut Size	Voltage	IP	CRI	Beam Angle	PCB Size	Package	Luminous
8W ±10%/M	0.5M	AC 120V 50-60Hz	65	80	120°	15*26MM	50M/Roll	200 ±10%LM

CCT: 2700-3000-4000K



**ITEM:** LED4M-CANDY-MICRO-ROPELIGHT  
24V-200LED/10M

Specification	Voltage	IP	Color	Function
200LED/10M	DC 24V	65	Monochrome Or Four Color	Certified 8 Function Wall Mounted Power Supply With Remote Control

**CCT:** RGB



**ITEM:** LED4M-G50BALL-LIGHSTR  
WPINE-20LED/9M-MOAPP-USB

Specification	Voltage	IP	Power Supply	Functions
20LED/9M	DC 5V	65	USB	Remote control + Mobile Phone APP

**CCT:** RGB  
Phantom



**ITEM:** LED4M-STRABERY-STR-5V  
50LED/7M-MOBAPP

Specification	Voltage	IP	Color	Functions
50LED/7M	DC 5V	65	Phantom	Mobile Phone APP

**CCT:** RGB



**ITEM: LED4M-G50BALL-LIGHSTR-WPINE  
20LED/9M-MOAPP-USB-A19**

Specification	Voltage	IP	Power Supply	Functions
20LED/9M	DC 5V	65	USB	Remote control + Mobile Phone APP

**CCT: RGB  
Phantom**



**ITEM: LED4M-PHAN-PEARBALL  
SET-REM-100LED/9M-USB**

Specification	Voltage	IP	Power Supply	Functions
100LED/10M	DC 5V	65	USB	Remote Control + Mobile Phone APP Music Sound Control Function

**CCT: RGB  
SMD 3939 Colorful Spot Control**



**ITEM: LED4M-G50BALL-LIGHSTR-WPINE  
100LED/10M-MOBAPP-USB**

Specification	Voltage	IP	Power Supply	Functions
100LED/10M	DC 5V	65	USB	Remote Control + Mobile Phone APP Music Sound Control Function

**CCT: RGB  
Magic Ball**



**ITEM: LED4M-5V-RGB-ROPELIGHT**

WATT	Voltage	IP	Power Supply	Functions
25W/5M ±%10	DC 5V	67	USB	5M Strips + IR Remote Control

**CCT: RGB**



**ITEM: LED4M-MICRO-ROPELIGHT-24V 200LED/10M**

Specification	Voltage	IP	Color	Functions
200LED/10M	DC 24V	65	Double Color Without Limit	8-Function With Remote Control

**CCT: RGB**

Wall-Mounted Power Supply With Built In Functions



**ITEM: LED4M-RGB-FLEXLIGHT-5M-IP65**

WATT	Voltage	IP	Power Supply	Functions
5W/5M ±%10	DC 5V	65	USB	5M Strips + IR Remote Control

**CCT: RGB**  
Chasing



## NOTE:





# 4M

**Address:**

7250 Keele Street, Unit 192,  
Concord, ON L4K 1Z8

**Phone Number:**

+1(416) 727-0702  
+1(647) 570-5571

[WWW.LED4M.CA](http://WWW.LED4M.CA)

[INFO@LED4M.CA](mailto:INFO@LED4M.CA)